

Trimble Mini Prism Kit



Maintain total system integrity with prisms built to Trimble® standards.

Part number and kit contents

Mini Prism Kit (PN 187311)

Mini prism

Sectional poles

4x 300 mm pole segments + 50 mm tip

Mini-pole / Pole adapter

Mini pole: 200 mm to center of prism
Pole adapter: 1/4in to 5/8in UNC thread adapter allowing 135 mm standard Trimble target height

Carry Case


420 mm L × 130 mm W × 100 mm H (16.54 in L × 5.12 in W × 3.94 in H)
1.46 kg (3.22 lb) (including contents)

Trimble Mini Prism Kit

General specifications	
Prism diameter	25.4 mm (1 in)
Prism constant	-17.00 mm offset: with prism on rod over survey point. In this position the prism is nodal mounted. 0 mm offset: with prism reversed and tip of canister placed against the measurement surface.
Centering accuracy	±0.3 mm (0.01 in)
Prism rear coating	Protected silver
Anti-reflective coating	Yes. Optimized for use with Trimble EDMs
Measurement range ¹	1,500 m (4,921 ft)
Tracker range ¹	500 m (1,640 ft)
Prism height	Modular height system depending on mounting option 50 mm from base of prism frame to center of prism
Mounting options	1/4 in UNC threads allow for modular mounting combinations
Integrated leveling bubble	Yes. 25', adjustable

¹ Standard clear atmosphere: No haze. Overcast or moderate sunlight with very light heat shimmer. Range may vary with instrument and EDM type.

Modular prism height

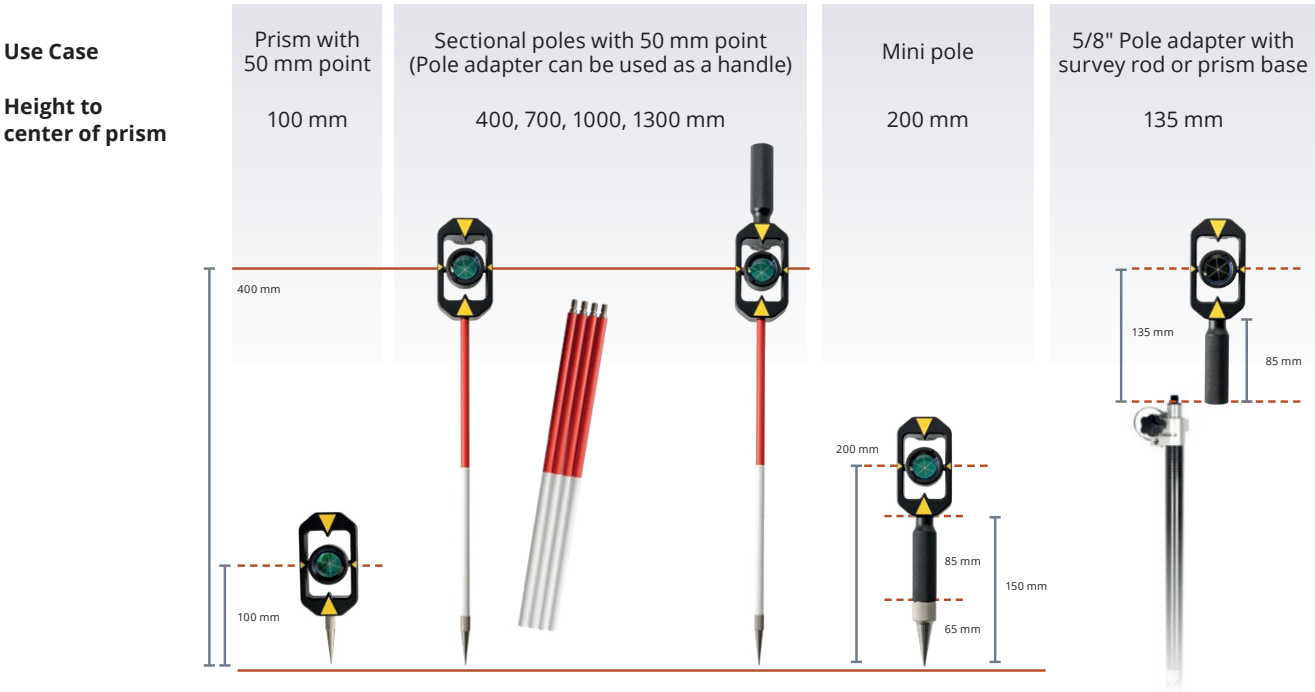

Contact your local Trimble Authorized Distribution Partner for more information

NORTH AMERICA
Trimble Inc.
10368 Westmoor Dr
Westminster, CO 80021
USA

EUROPE
Trimble Germany GmbH
Am Prime Parc 11
65479 Raunheim
GERMANY

ASIA-PACIFIC
Trimble Navigation
Singapore PTE Limited
3 HarbourFront Place
#13-02 HarbourFront Tower Two
Singapore 099254
SINGAPORE

